


PLAN VIEW

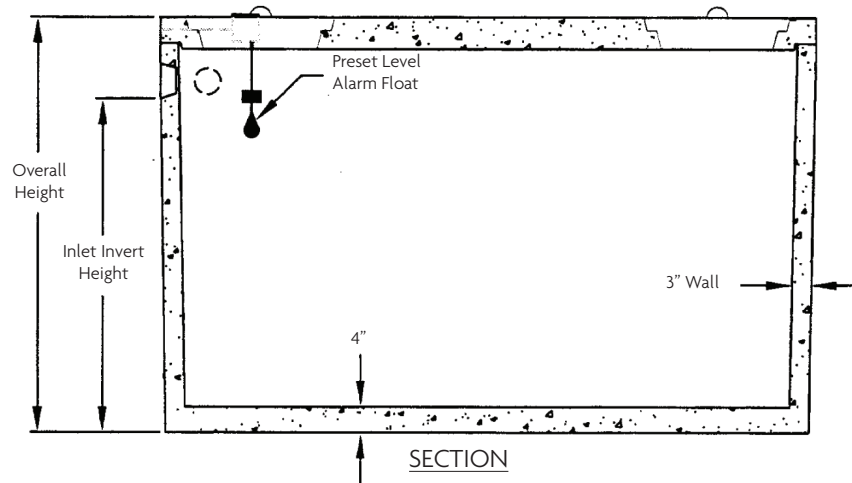

SECTION

Capacity	Type	Length	Width	Height	Inlet	Weight
1,000 Gal.	1 Piece	8'-6"	4'-10"	5'-4"	4'-6"	8,700 lbs.
1,000 Gal.	Low Boy	10'-5 1/2"	6'-3"	4'-1"	3'-1"	11,000 lbs.
1,500 Gal.	1 Piece	10'-5"	6'-2 1/2"	5'-5"	4'-6"	12,900 lbs.
2000 Gal.	1 Piece	10'-5 1/2"	6'-3"	6'-3"	5'-4"	15,000 lbs.

DESIGN NOTES:

- 1) Regular and Heavy Duty Tanks are suitable for installation in NON-Traffic areas up to burial depths of 3 feet and 5 feet, respectively.
- 2) Concrete Mix Design is 4,000 PSI standard at 28 days, Type 3 Cement.
- 3) Reinforcing Steel, ASTM A 615, Grade 60
- 4) Ship lap joint sealed with butyl sealant.
- 5) All covers provided with pencil rod handles or lift loops.
- 6) A Junction Box w/ prewired High Water Alarm Float is cast into the Cover. The alarm is provided stock with 30 feet of 12-2 UF cable. Additional cable provided upon request and at additional cost.
- 7) POLYLOK PIPE SEALS standard at all pipe penetrations.