


Residential Grease Trap

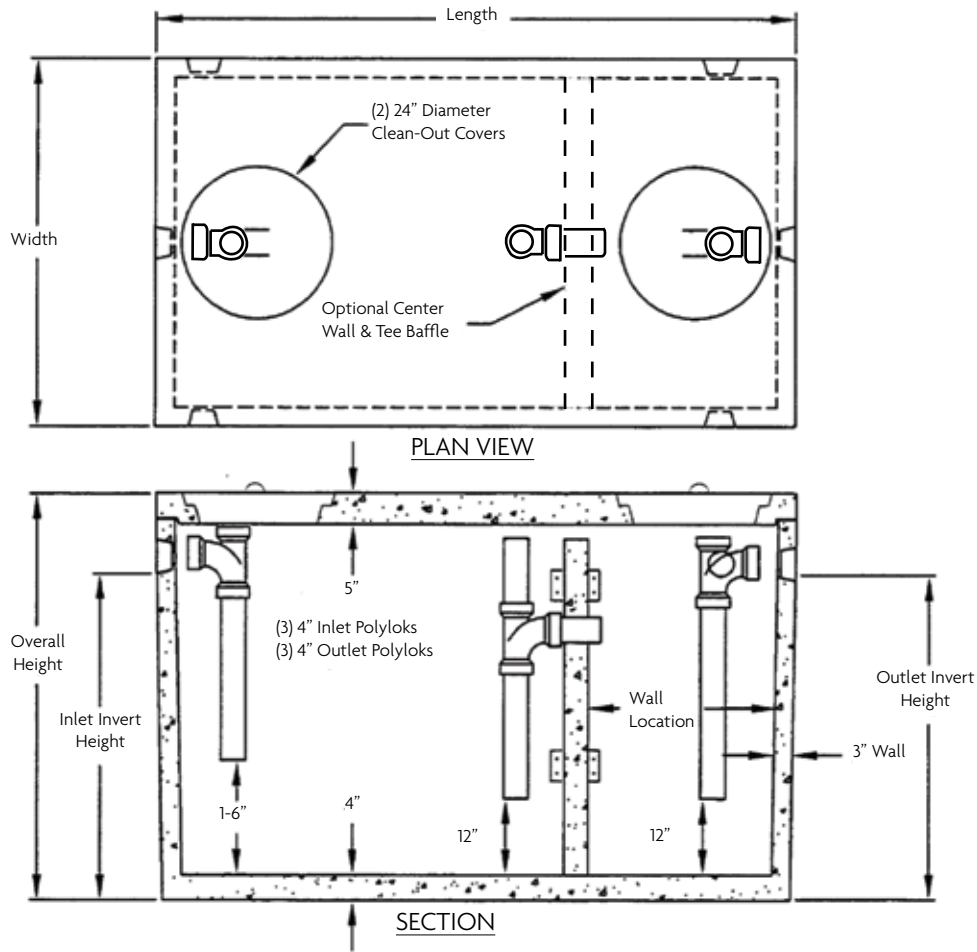

Capacity	Type	Length	Width	Height	Inlet	Outlet	Wall Location	Weight
1,000 Gal.	1 Piece	8'-6"	4'-10"	5'-4"	4'-6"	4'-3"	2'-8"	8,700 lbs.
1,000 Gal.	Low Boy	10'-5 1/2"	6'-3"	4'-1"	3'-1"	2'-10"	3'-4"	11,000 lbs.
1,500 Gal.	1 Piece	10'-5"	6'-2 1/2"	5'-5"	4'-6"	4'-3"	3'-4"	13,800 lbs.
2,000 Gal.	1 Piece	10'-5 1/2"	6'-3"	6'-3"	5'-4"	5'-1"	3'-4"	15,000 lbs.

DESIGN NOTES:

- 1) Regular and Heavy Duty Tanks are suitable for installation in NON-Traffic areas up to burial depths of 3 feet and 5 feet respectively.
- 2) Concrete Mix Design is 4,000 PSI standard at 28 days, Type 3 Cement.
- 3) Reinforcing steel ASTM A615, Grade 60.
- 4) Shiplap joint sealed with butyl sealant.
- 5) All covers provided with pencil rod handles or lift loops.
- 6) POLYLOK PIPE SEALS standard at all pipe penetrations.
- 7) 4" PVC Tee Baffles can be placed at any of the (3) Inlets and Outlets.
- 8) Optional Center Wall held in place with aluminum angle clips and sealed to the tank walls with Sika Flex 1A sealant.